

Small kVA 3 Phase Isolation Transformer**TT2078-TT2084**

VA:	350, 500, 750, 1000, 1500 2000, 3000	Phase:	Three-Phase
Input Voltage:	400 Delta	Frequency:	50 Hz
Output Voltage:	600Y/347	BIL:	4 kV
Taps:	See wiring diagram	Coils:	Copper
Insulation Class:	Class F 155° C	Temp Rise:	N/A
Impedance:	2.5 - 3.5%		

NEMA 1 Enclosure

10 Full 10 Year Warranty**Feature Highlights**

10 Year Warranty
UL Listed
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

Optional Features

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


Small kVA 3 Phase Isolation Transformer

TT2078-TT2084

60 Hz

TT2078	350 VA
TT2079	500 VA
TT2080	750 VA
TT2081	1000 VA
TT2082	1500 VA
TT2083	2000 VA
TT2084	3000 VA

Wiring Connection		
Pri. Volts	Connect Taps	Line Leads
400	1- X1 & 2- X2 & 3 - X3	X1, X2, X3
Sec. Volts	Connect Taps	Line Leads
600 (347)	1- H1 & 2- H2 & 3 - H3	H1, H2, H3(H0)

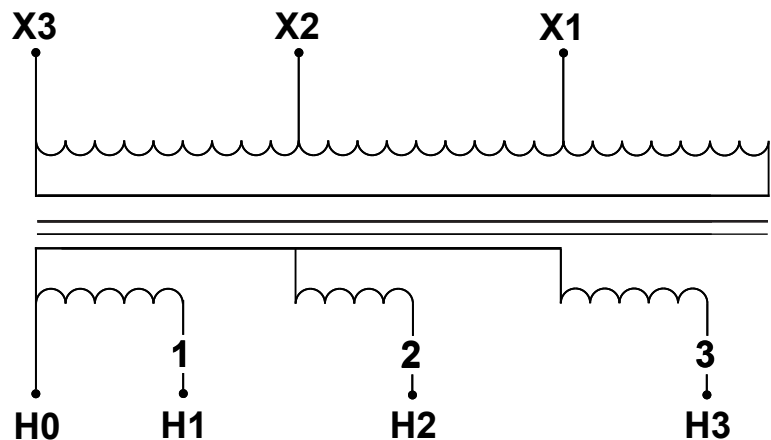


Small kVA 3 Phase Isolation Transformer

TT2078-TT2084

Enclosed Units

VA	350	500	750	1000	1500	2000	3000
Part # 60 Hz	TT2078	TT2079	TT2080	TT2081	TT2082	TT2083	TT2084
Enclosure #	1	1	2	2	2	2	2
Enclosure Weight (lbs.)	22	24	37	40	54	60	69

No. 1 ENCLOSURE (With 4 x 0.5" mounting holes)

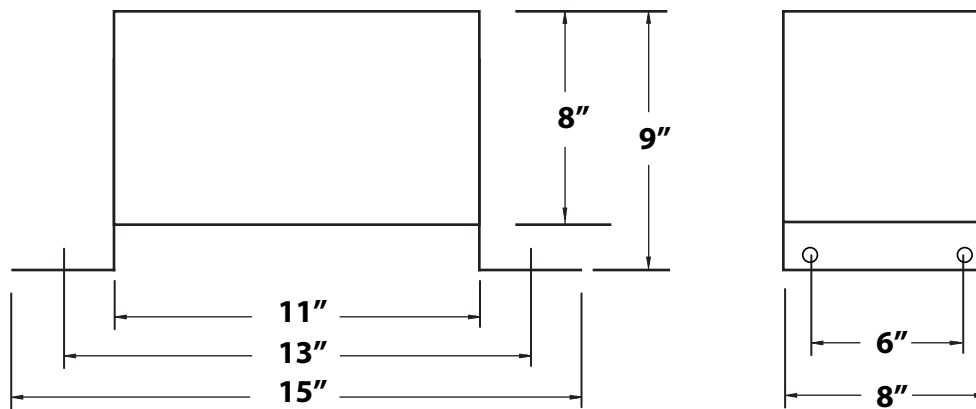

No. 2 ENCLOSURE (With 4 x 0.5" mounting holes)

